

This system called « spot earth clamp » enables to fix the earth clamp to a small descaled part inferior to 2mm, instead of 20 mm for the previous model.


Furthermore, the maintaining magnet enables you a use the system in every positions, whether it is horizontal or vertical.

This earth clamp is to be used with the dent pulling range machine GYSPOT. (*does not function with the monopoint*).



SIMPLE AND EFFICIENT

► Classical Process

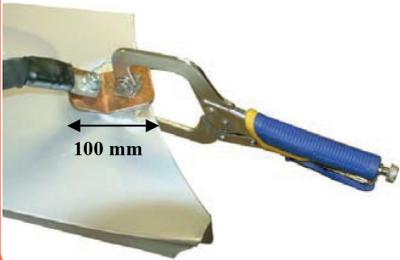

► PREVIOUS
MAGNETIC EARTH CLAMP



► NEW MAGNETIC EARTH CLAMP



USING PROCESS

Step 1:

Weld the conducting mass with the gun



Step 2:

Screw the spot earth clamp

